

IoT Based Indoor Navigation and Automated Stock Management in Smart Marts

T. Jagannadha Swamy, Yasam Vijaya Lakshmi, Aamani Katuri and Shaik Afreen Sumiya

Cite as: Swamy, T. J., Lakshmi, Y. V., Katuri, A., & Sumiya, S. A. (2024). IoT Based Indoor Navigation and Automated Stock Management in Smart Marts. International Journal of Microsystems and IoT, 2(10), 1239–1245. <https://doi.org/10.5281/zenodo.14167603>



© 2024 The Author(s). Published by Indian Society for VLSI Education, Ranchi, India



Published online: 30 October 2024



Submit your article to this journal:



Article views:



View related articles:



View Crossmark data:



DOI: <https://doi.org/10.5281/zenodo.14167603>

Full Terms & Conditions of access and use can be found at <https://ijmit.org/mission.php>



IoT Based Indoor Navigation and Automated Stock Management in Smart Marts

T. Jagannadha Swamy, Yasam Vijaya Lakshmi, Aamani Katuri and Shaik Afreen Sumiya

Department of Electronics and Communication Engineering, Gokaraju Rangaraju Institute of Engineering and Technology, Hyderabad, India

ABSTRACT

In this present world, with everything being automated individuals choose smart devices and digital data for daily use. Due to the size and complexity of large indoor spaces like huge supermarkets, people need guidance to find way to their destination. In this research, we have created an android mobile application based on QR (Quick Response) code scanner technology to help individuals to navigate in indoor spaces. Our objective is to minimize shopping time and traditional ask and find method by providing indoor navigation system for people who are unfamiliar with the area. We have utilized IoT (Internet of Things) technology in the automated stock management system because of its usage in real time applications in management, reliability and security in data usage. Using load cell sensor, the weight of the product will be measured and updated dynamically in the app. So, the customer and manager will be able to know the quantity of each product along with the navigation.

KEYWORDS

Indoor navigation, Firebase, Load cell Sensor, FCM (Firebase Cloud Messaging), QR code technology, Android based Smart Phone.

1. INTRODUCTION

The use of indoor navigation systems is growing because of advancements in mobile computing and internet-based communication. Greater public use of geographical information creates new applications which increases the need for indoor representations and the tools needed to use them [1],[21]. Indoor navigation devices are meant to assist clients, as people tend to forget their direction more easily within buildings than outside. By providing reference points and other information, the conceptual work associated with route planning, orientation, and monitoring is also reduced [2],[23],[24].

After analyzing the current apps and considering the issues in the indoor space, it has been determined that the following improvements are necessary for these apps: Presenting more data that is tailored to the area to assist within an environment and creating a system that functions in every real-world setting [3],[20]. This study suggested the indoor navigation system to help users find their way precisely inside buildings to address the problem. A guided route to the user's chosen destination is displayed as the user's position is continuously tracked by navstore app which we created [4],[25].

In this indoor navigation application, instant dynamic updates about product quantity and details are provided which reflect changes in product quantity as soon as they

occur, ensuring real-time accuracy [5],[19]. It is a convenient feature in stock management scenarios, e-commerce using IoT which is user friendly and interactive.

The IoT device that sends updates to the android application comprises of a load cell, where we place each load cell below a container which measures the quantity by calibration [6],[13]. This load cell is interfaced with ESP32 (Espressif Systems Processor 32) micro controller which is a wireless Bluetooth and Wi-Fi module for measuring voltage levels and built in ADC (Analog to Digital Converter) to convert analog signal from the load cell to a digital value.

This device also notifies the user when product quantities fall below the predefined thresholds to indicate low level or unavailability of stock [7],[14]. The managers are alerted through a text message to prompt restocking actions.

To store and manage databases we have used google firebase as our data base management system to keep track of all the necessary information like indoor map locations or routes and product data related to it for offline navigation in case of limited connectivity.

The remaining sections of the paper are structured as follows: In section II, Literature review about existing approaches is discussed. Flow charts are discussed in the system model of section III. In section IV, problem methodology was explained and their systematic approach. In Section V, it shows us the results and discussions based on obtained outputs and followed by conclusion.

2. REVIEW OF EXISTING LITERATURE

The methods and techniques developed in various literature surveys are discussed below. According to Smart Grocery Management System Using IoT, the system helps the user purchase wisely for groceries [8]. The ultrasonic sensor in this system is used to measure the level. To gauge the humidity inside the container, it also incorporates a temperature sensor. The development of an application to place orders for groceries automatically is the next task.

A system where the kitchen cabinet is equipped with a sensor to measure the weight of products in jars that are marked with RFID tags for location identification is proposed by the Design of Smart Kitchen Management System using IoT [9],[17]. Depending on how the product is used, an automated shopping list is created. The notion for RFID (Radio Frequency Identification) tag identification without additional hardware is implemented through the analysis of a UHF (Ultra High Frequency) RFID system for interior position sensing [18].

A brief overview of the available interior navigation tools showed that, for the purpose of this discussion, every one of them is not ideal. The indoor navigation using QR codes these are not used only for positioning, but also for escorting users along the route [10]. Therefore, the premise of this study on indoor navigation is that users can orient themselves enough if initial location is only gained through reference points. By means of scrutinizing the outcomes acquired from user-completed navigation tasks, we acquired information pertaining to the elements that are frequently referenced [11]. The findings demonstrate that individuals orient themselves differently within the same environment and utilize the environment's structural aspects as their primary points of reference.

3. SYSTEM MODEL

In this indoor navigation and automated stock management system admin app and navstore app was developed. In this system there are several objects that play a key role in managing the product data and navigate towards the destined products.

Admin app contains the data of all the products and history of the orders placed. This data is stored in the firebase and can retrieve the data at any moment if in case of loss of data. It also alerts the manager by a text message when the quantity goes down by the limit using firebase cloud messaging system. So that the manager will be alert and refill the stock. Fig. 1 shows the flowchart for admin app.

We have developed Navstore app where customers can find their way to reach their destined products effortlessly. As in Fig. 2 it represents the flowchart for navstore app and through QR code technology we can navigate our desired product in supermarket. We can place order in terms of units of grams where this data dynamically updated to the navstore app. This data is also reflected in the admin app where the manager can be able to see the quantity of each product available. We have loaded the static maps for each node-to-node reference point and gave these images as an input to the user.



Fig. 1 Flowchart for manager login

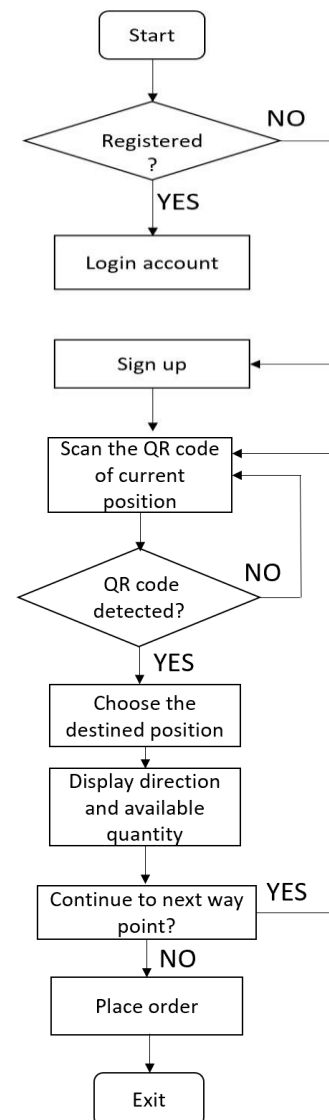


Fig. 2 Flowchart for customer login

Fig. 3 represents the architecture for automated stock management system. In this system we use load cell sensor which weighs the product by amplifying the analog signal to digital signal using HX711 amplifier.

This system gives us the weight of the products by placing the load cell sensor beneath the product containers, the force or pressure applied on it gives us the voltage fluctuations. Due to this this voltage fluctuations the amplifier helps us to amplify the analog signal to digital signal where we can display the value in units. We have also kept an alert if the quantity goes down the threshold value. We also notify the users or customers if the product is out of stock by displaying the number of quantity available in the indoor navigation application [12],[22].

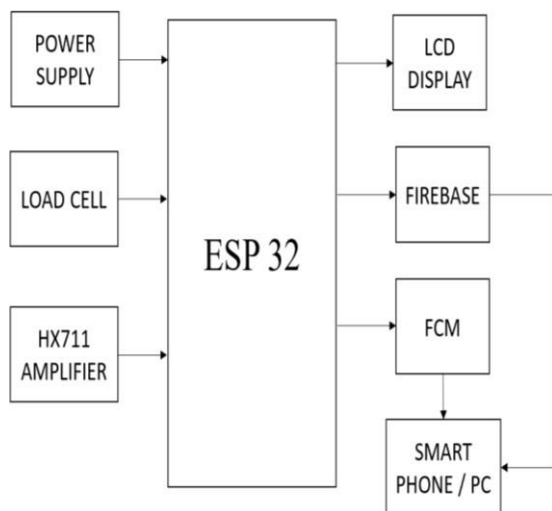


Fig. 3 Architecture for stock management

4. METHODOLOGY

Our project methodology is based on the development of indoor navigation android app and also encompasses the IOT device for database stock management system. In Fig. 4 it describes the architecture of our project. We have divided the application into two, which are Navstore app & Admin app. In Navstore app we have customer login, and we must scan our current location, and it asks for the destined product you want to reach. Now choose the product that you want which provides directions to your destined product.

We have used QR code labels placed at every point of location, the user should select the scan option to identify their current location by scanning the QR code label placed on the nearest product [9]. It then asks what is your destined product location, chooses your desired location and it will show you the static map present in it. These static maps are designed manually and loaded the map in from and to user locations. This application only works on android based smart phones.

Reference points are noticeable components of the surroundings that help individuals find their location and

identify the spatial links between paths and things. Here we are using QR code labels at reference points in real environments to help people comprehend the purposes and locations of landmarks [4]. For example, every section in the supermarket such as dairy products, cleaning, vegetables, a stairway can be used as structural reference points. These are highly usable and have a vivid location in the environment.

In this system, online indoor floor plans or maps can be obtained in advance to provide spatial reference [5]. Initial location and destination come from users input displaying the enroute location to the customer connecting the location corresponding to the scanned QR label and the selected destination from the dropdown list in the application [6].

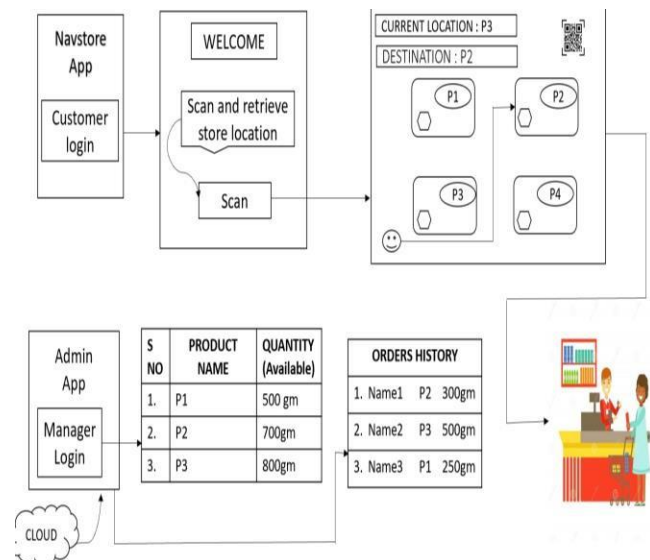


Fig. 4 APP design Overview

It also displays product information while navigating, like how much quantity is present and is the stock available or not. In the Admin app we have a manager login section, the manager will be able to see the product details and also about orders history of the customers. The manager will get a text message through fcm which is used to get push notifications when the product quantity goes down by the threshold value.


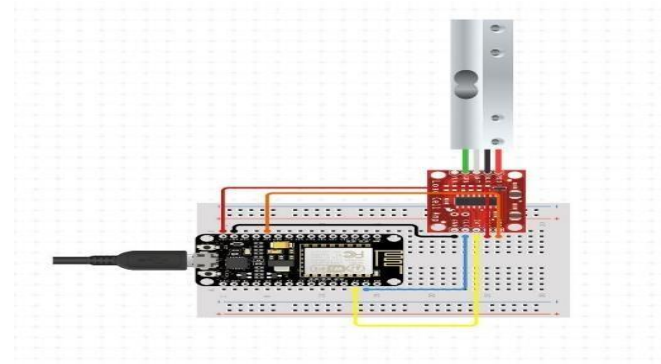


Fig. 5 Hardware circuit connections

In this system the output is shown on a serial monitor which displays the weight of each product when we placed and this data will be stored in firebase. We have now interfaced this data with the application which we have deployed for indoor navigation to represent the data in it [12]. We have used Arduino platform to code by using C++ language and using java language we have deployed navstore and admin app through API.

Calibration factor = (reading / known weight)

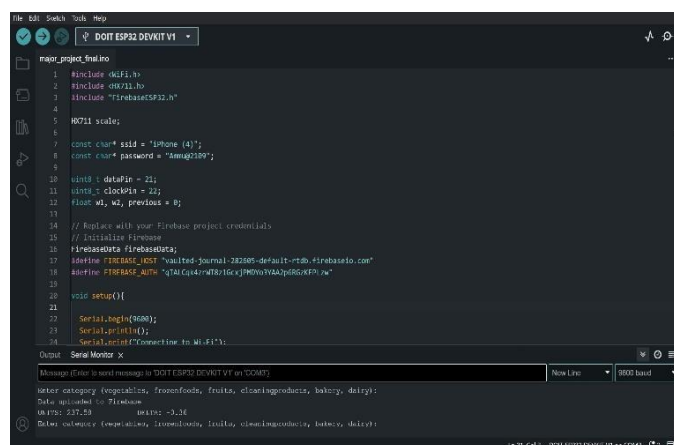

In Fig. 7, we have placed tomatoes under vegetable section as a prototype on the load cell, loadcell converts the force applied on it in to digital values and we can be able to see the quantity present in our navstore app and admin app.

Time to time when the quantity of the product changes it automatically updates in the firebase system which reflects in the navstore and admin apps.

Similarly, another product is placed under dairy section as shown in Fig. 8 whose weight is measured by load cell and amplified by the HX711 sensor connected to load cell to amplify and condition the signal received from it and interacts with esp32 micro controller that further pushes those weight values to the firebase cloud. It also updates the value if the quantity is removed or added dynamically after some time. We have created a grocery mart which has QR codes, where we can scan our current location through it as shown in the Fig 9.



From Fig. 10 to Fig. 15, these are the outputs of navstore app and admin app. In Fig. 10 we can see that the first step is by signup or through login. Fig. 11 shows the scan option where we can know our current location by scanning it and next choose the destined product you want to reach in the store. Now you will be getting a static map where you can know about the quantity of respective products, and we can choose how much quantity is to be placed as shown in Fig. 12.



Fig. 9 Grocery mart

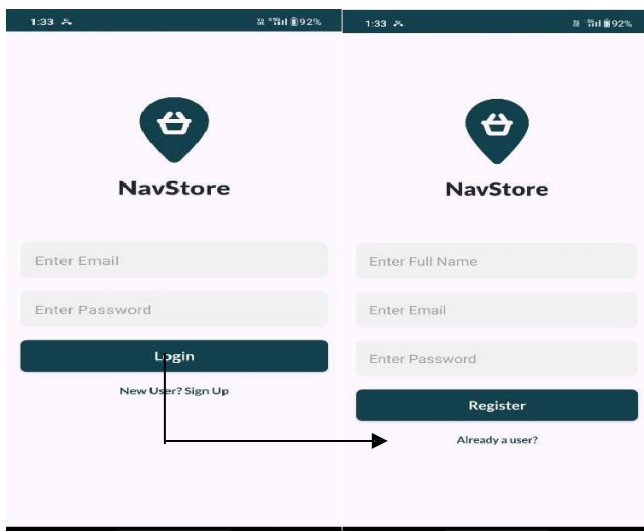


Fig. 10 Customer login

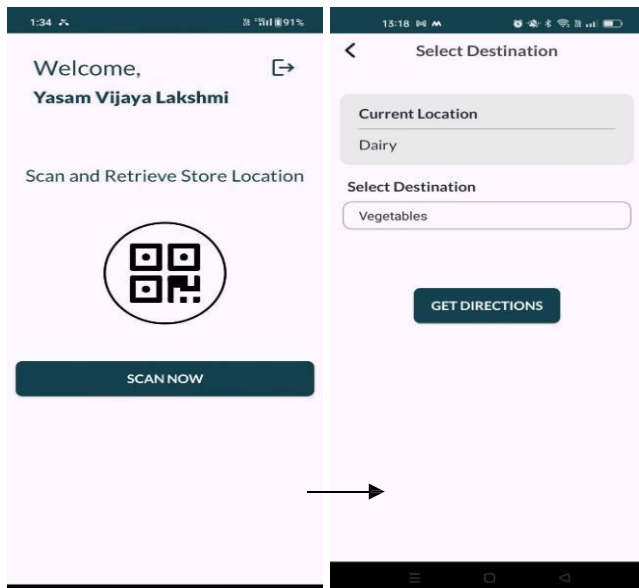


Fig. 11 Scan and choose your destined product

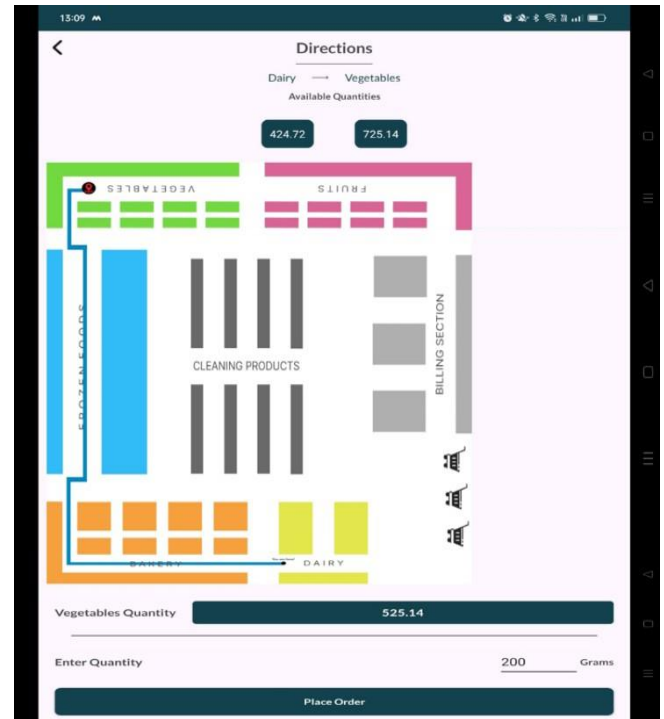


Fig. 12 Results obtained during prototype testing

In Admin app manager will be logged through it as shown in Fig. 14 and after login he/she will be able to see the stock available in the navstore app or in supermart. He / She can also know about orders history if placed any by the customers in detail, for example customer name, the product they placed and how much quantity as shown in Fig. 15. The manager will also get alert in the admin app through a text message with the help of fcm. Here we have kept the limit value of 100grams. So, if the quantity goes down by the limit the manager will get a text message to refill the stock. We can see it in Fig. 13.

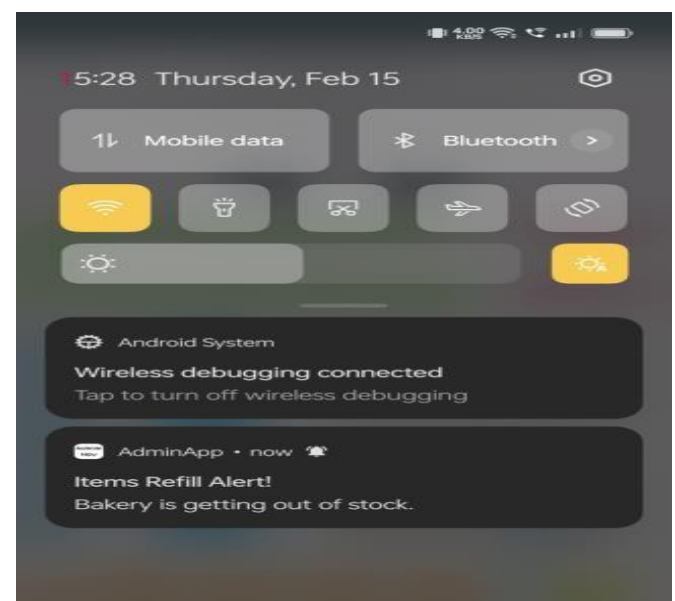


Fig. 13 Alert message to the manager

Admin app outputs:

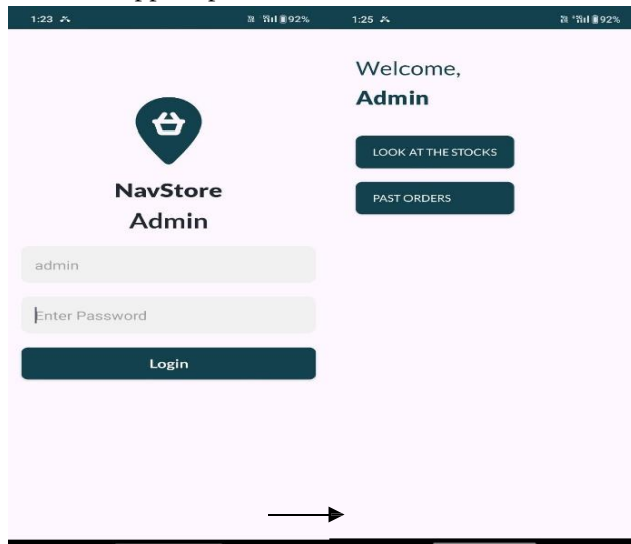


Fig. 14 Admin login

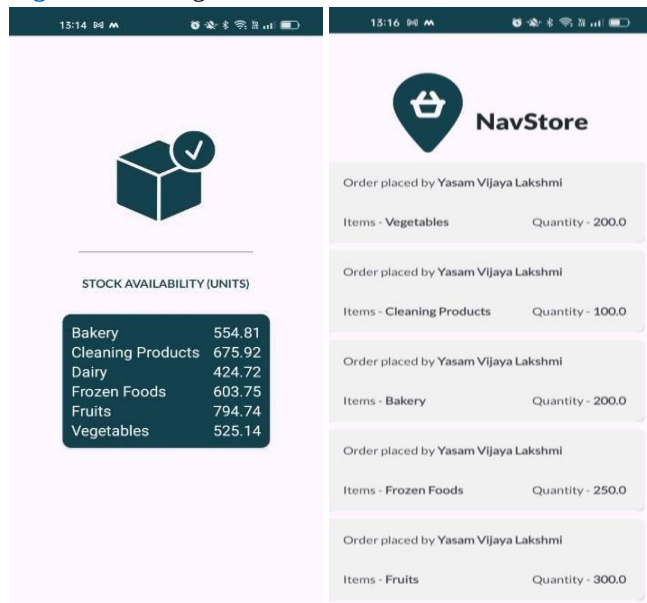


Fig. 15 Stock Availability & Orders History

6. CONCLUSION

In conclusion, the indoor navigation and automated stock management system using IoT has successfully demonstrated integration of modern technology to enhance efficiency and convenience of managing product supplies. Through implementation of connected sensors, microcontrollers and cloud-based platform, we achieved real-time monitoring and stock management. QR code-based navigation offers a contactless solution where customers can easily identify the products in an unknown supermarket through navstore app which also provides the information related to the product quantity along with the directions. Also, managers can easily be able to know when the product is out of stock through admin app and they refill the stock immediately. Future scope of smart indoor navigation is we can deploy this indoor navigation using dynamic approach to acquire real time location for customers. We can also place a temperature sensor inside the container to measure the humidity of it, such that we can know about the product quality.

REFERENCES

1. M. Khan, M. Shahid, H. Mansoor, U. Shafique, M. Khan, A. Khan, "IoT based Grocery Management System: Smart Refrigerator and Smart Cabinet", International Conference on Systems of Collaboration Big Data, Internet of Things & Security (SysCoBioTS), 2019. Publisher: IEEE <https://doi.org/10.1109/SysCoBioTS48768.2019.9028031>
2. Jagannadha Swamy, T., Pavan Kumar, G., & Murthy, T. N. (2020). Novel Secure Multipurpose Information Service and Management System with the help of Internet of Things. 2020 International Conference on Computer Communication and Informatics (ICCCI). <https://doi.org/10.1109/ICCCI48352.2020.9104134>
3. Daria Mamaeva, Mikhail Afanasev, Vitaliy Bakshaev, Mark Kliachin. A multi-functional method of QR code used during the process of indoor navigation – 2019 <https://doi.org/10.1109/EnT47717.2019.9030587>
4. Amanda Haberland Antunes, Luciene Stamato Delazari. Landmarks evaluation with use of QR-CODE for positioning indoor environment - 2019 <http://dx.doi.org/10.1590/s1982-21702019000400024>
5. Pavithra, R., Karthigha, M., Hema, A., Bharathi, K. R., & Madhumitha, A. (2021). Cloud based Smart Pantry System using IoT. 2021 6th International Conference on Inventive Computation Technologies (ICICT). <https://doi.org/10.1109/ICICT50816.2021.9358761>
6. A. Balaji, B. Satyasri, S. Vanaja, M. N. Manasa, M. Malavega, S. Maheshwari. Smart Kitchen Wardrobe System Based on IoT. Proceedings of the International Conference on Smart Electronics and Communication (ICOSEC 2020) IEEE. <http://dx.doi.org/10.1109/ICOSEC49089.2020.9215459>
7. Huijun Ren, Peishan Chai, Yanbing Zhang, Dong Xu, Tao Xu & Xiang Li (2017) Semiautomatic indoor positioning and navigation with mobile devices. <https://doi.org/10.1080/19475683.2016.1276101>
8. Lin, S. S., Hu, M. C., Lee, C. H. and Lee T. Y. 2015. Efficient QR Code Beautification with High Quality Visual Content. IEEE Transactions on Multimedia, Volume: 17, Issue <https://doi.org/10.1109/TMM.2015.2437711>
9. A. Idrees, Z. Iqbal and M. Ishfaq, "An efficient indoor navigation technique to find optimal route for blinds using QR codes," 2015 IEEE 10th Conference on Industrial Electronics and Applications (ICIEA), Auckland, New Zealand, 2015, pp. 690-695 <https://doi.org/10.1109/ICIEA.2015.7334197>
10. G. S. Bellutagi, D. Priya and M. Amith, "Indoor Navigation Using QR Code, Pedometer and IBeacon," 2017 2nd International Conference on Computational Systems and Information Technology for Sustainable Solution (CSITSS), Bengaluru, India, 2017, pp. 1-8 <https://doi.org/10.1109/CSITSS.2017.8447823>
11. T. J. Swamy and T. N. Murthy, "eSmart: An IoT based Intelligent Health Monitoring and Management System for Mankind," 2019 International Conference on Computer Communication and Informatics (ICCCI), Coimbatore, India, 2019, pp. 1-5 <https://doi.org/10.1109/ICCCI.2019.8821845>
12. T. J. Swamy, G. P. Krishna, H. B. Valiveti and D. L. Chaitanya, "Novel IoT Based Health Monitoring and Management System for Rural People," 2022 International Conference on Computer Communication and Informatics (ICCCI), Coimbatore, India, 2022, pp. 01-06 <https://doi.org/10.1109/ICCCI54379.2022.9740873>

13. Ankush Yewatkara, Faiz Inamdarb, Raj Singhc, Ayushyad, Amol Bandale, "Smart Cart with Automatic Billing, Product Information, Product Recommendation Using RFID & Zigbee with Anti-Theft", 7th International Conference on Communication, Computing <https://doi.org/10.1016/j.procs.2016.03.107>
14. S. Banka, B. Kanchanapalli, V. Gadde, S. M. Sudhamalla, V. Anantha and P. Uppalapati, "Smart Kitchen Monitoring System using IoT Technology," 2024 International Conference on Automation and Computation (AUTOCOM), Dehradun, India, 2024, pp. 303-307, <https://doi.org/10.1109/AUTOCOM60220.2024.10486174>
15. A. Hachani, I. Barouni, Z. Ben Said, and L. Amamou, "RFID based smart fridge," 8th IFIP Int. Conf. New Technol. Mobil. Secur., pp. 0-3, 201 <https://doi.org/10.1109/NTMS.2016.7792472>
16. C. Ryan Paul Jess. et al., "Smart Automated Kitchen System using Internet of Things," 2023 International Conference on Computer Communication and Informatics (ICCCI), Coimbatore, India, 2023, pp. 1-4, <https://doi.org/10.1109/ICCCI56745.2023.10128637>
17. B. Bharti, M. Kumar and U. Chauhan, "Smart Kitchen using IOT," 2023 International Conference on Artificial Intelligence and Smart Communication (AISC), Greater Noida, India, 2023, pp. 796-799 <https://doi.org/10.1109/AISC56616.2023.10084932>
18. D. K. Shah, R. Singh, A. Gehlot, S. Khantwal, A. J. Ahmad and S. V. Akram, "Smart Kitchen: Real Time Monitoring of Kitchen through IoT," 2022 3rd International Conference on Intelligent Engineering and Management (ICIEM), London, United Kingdom, 2022, pp. 718-722, <https://doi.org/10.1109/ICIEM54221.2022.9853161>
19. Y. Li, P. Zhang, H. Lan, Y. Zhuang, X. Niu and N. El-Sheimy, "A modularized real-time indoor navigation algorithm on smartphones," 2015 International Conference on Indoor Positioning and Indoor Navigation (IPIN), Banff, AB, Canada, 2015, pp. 1-7 <https://doi.org/10.1109/IPIN.2015.7346784>
20. Z. Li and J. Huang, "Study on the use of Q-R codes as landmarks for indoor positioning: Preliminary results," 2018 IEEE/ION Position, Location and Navigation Symposium (PLANS), Monterey, CA, USA, 2018, pp. 1270-1276 <https://doi.org/10.1109/PLANS.2018.8373516>
21. Y. Zhuang, Y. Kang, L. Huang and Z. Fang, "A Geocoding Framework for Indoor Navigation based on the QR Code," 2018 Ubiquitous Positioning, Indoor Navigation and Location-Based Services (UPINLBS), Wuhan, China, 2018, pp. 1-4 <https://doi.org/10.1109/UPINLBS.2018.8559741>
22. S. Rezwani, W. Ahmed, M. A. Mahia and M. R. Islam, "IoT Based Smart Inventory Management System for Kitchen Using Weight Sensors, LDR, LED, Arduino Mega and NodeMCU (ESP8266) Wi-Fi Module with Website and App," 2018 Fourth International Conference on Advances in Computing, Communication & Automation (ICACCA), Subang Jaya, Malaysia, 2018, pp. 1-6 <https://doi.org/10.1109/ICACCA5.2018.8776761>
23. S. Birla et al., "Disha-Indoor Navigation App," 2020 2nd International Conference on Advances in Computing, Communication Control and Networking (ICACCCN), Greater Noida, India, 2020, pp. 517-522 <https://doi.org/10.1109/ICACCCN51052.2020.9362984>
24. U. T. Chitra, R. K. H. M. and P. S., "Indoor Campus Navigation using Web Application System for Seamless University Mobility," 2023 Intelligent Computing and Control for Engineering and Business Systems (ICCEBS), Chennai, India, 2023, pp. 1-4 <https://doi.org/10.1109/ICCEBS58601.2023.10448673>
25. S. Zhang, W. Qi, W. Zhou and L. Yang, "Indoor Precise Positioning and Navigation Technology in Emergency Evacuation Based on Simultaneous Localization and Mapping Technology," 2020 IEEE 10th International Conference on Electronics

Information and Emergency Communication (ICEIEC), Beijing, China, 2020, pp. 115-118, <https://doi.org/10.1109/ICEIEC49280.2020.9152288>

AUTHORS



Dr. Tata Jagannadha Swamy Professor in Department Electronics and Communication Engineering, GRIET, JNTU University, Hyderabad, India. He obtained his PhD from JNTUH, Hyderabad in 2016, Master of Engineering from in Systems and Signal Processing from UCEOU, Hyderabad in 2006 and Bachelor of Technology from Acharya Nagarjuna University, Guntur in 2001. His research interests are in the domain of Wireless Sensor Networks, Cognitive Radio Networks, Internet of Things, Wireless Communication and Signal Processing. He published several papers in IEEE, Springer, and Elsevier International Conferences. Published Papers in IEEE Journals and other reputed journals and conference.



Yasam Vijaya Lakshmi student in Department of Electronics and Communication Engineering, GRIET, JNTUH University, Hyderabad, India. Her research interests are in the domain of Internet of Things and its applications,

Machine Learning.

Corresponding

Author

e-mail:

vijayalakshmiyasam21@gmail.com



Katuri Aamani student in Department of Electronics and Communication Engineering, GRIET, JNTUH University, Hyderabad, India. Her research interests are in the domain of Internet of Things and its applications, Wireless, Embedded systems.



Shaik Afreen Sumiya student in Department of Electronics and Communication Engineering, GRIET, JNTUH University, Hyderabad, India. Her research interests are in the domain of Internet of Things and its applications.